


Flexible & Efficient Steel Barricades

Our effective and efficient crowd control barriers in wide range of sizes, colors and feet types can help with managing pedestrian traffic, crowd control and safety. It is ideal solution to construction sites, demonstration, public events, concerts and sport fields.

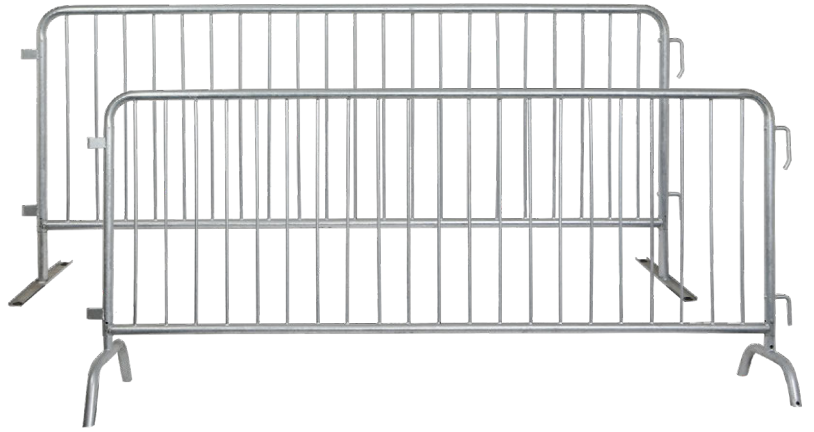

FEATURES & BENEFITS


Extreme Durability

Pipe material outer frame and infill uprights are strongest in the industry.



Galvanised & Powder Coated Finish

Hot dipped galvanised or powder coated for extremely harsh environments.

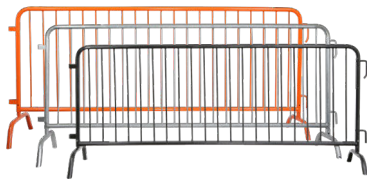


Customization Service

Reflective sheets, shade cloth, billboard or signage can be customized for your choice.



Barricades Gate

Pedestrian barricade gates can be supplied according to your sizes.





Flexible Feet Choice

Fixed or removable feet for choice.
Bridge, flat or wheel removable feet options.



TECHNICAL DETAILS

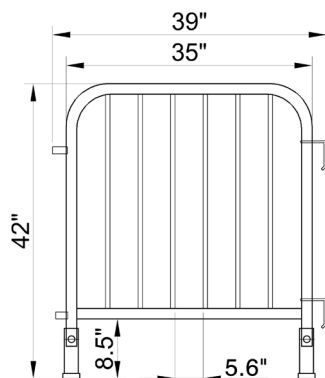

Length: 39".

Height: 42".


Main frame: 1-1/2" OD × 16 gauge thickness.

Grill: 6 uprights of 5/8" OD × 16 gauge thickness.

Upright spacing: 5.6".

Feet: flat/bridge/fixed.

TECHNICAL DETAILS

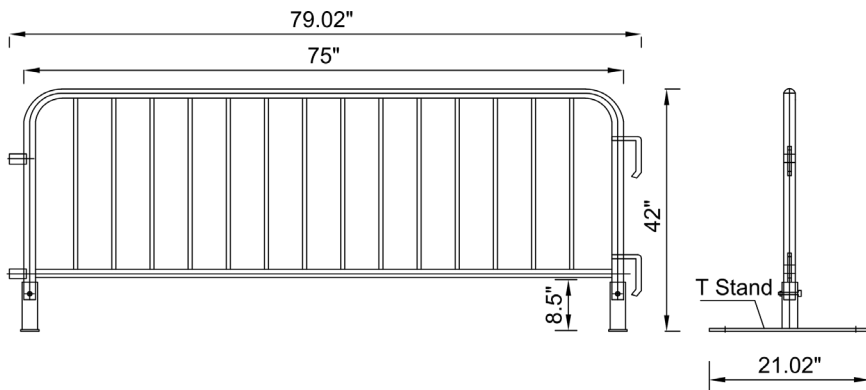

Length: 79".


Height: 42".

Main frame: 1-1/2" OD × 18 gauge thickness.

Grill: 14 uprights of 5/8" OD × 18 gauge thickness.

Upright spacing: 5.3".

Feet: flat/bridge/fixed.

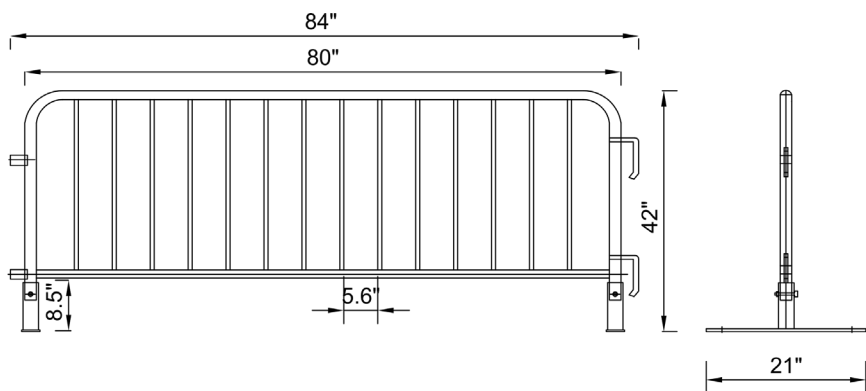

Length: 84".


Height: 42".

Main frame: 1-1/2" OD × 15 gauge thickness.

Grill: 14 uprights of 5/8" OD × 16 gauge thickness.

Upright spacing: 5.6".

Feet: flat/bridge/fixed.

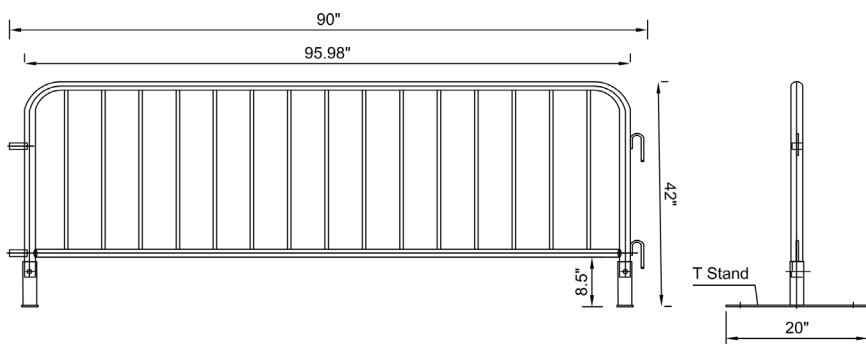

Length: 90".


Height: 42".

Main frame: 1-5/8" OD × 16 gauge thickness.

Grill: 15 uprights of 3/4" OD × 16 gauge thickness.

Upright spacing: 5.6".

Feet: flat/bridge/fixed.

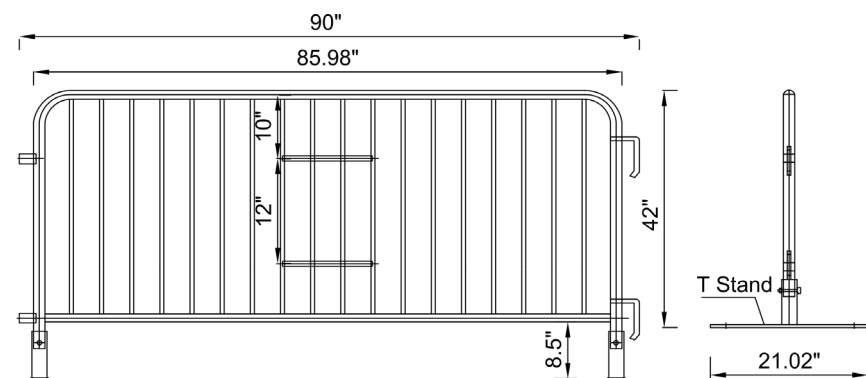

Length: 90".

Height: 42".


Main frame: 1-5/8" OD × 16 gauge thickness.

Grill: 18 uprights of 3/4" OD × 16 gauge thickness.

Upright spacing: 4.7".

Feet: flat/bridge/fixed.

TECHNICAL DETAILS

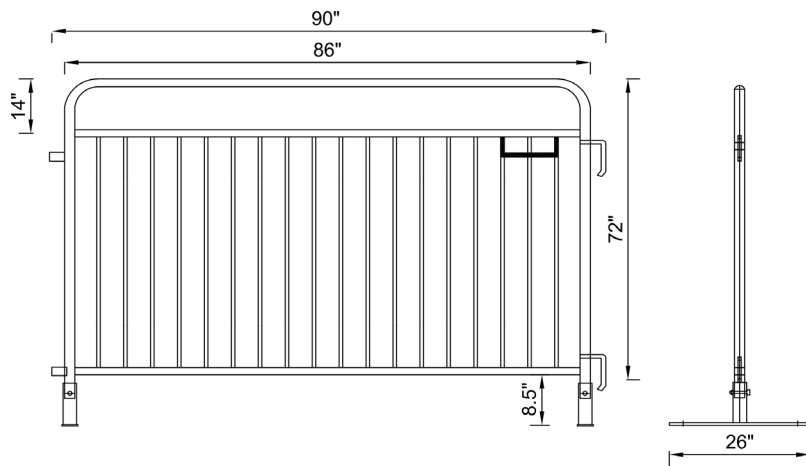

Length: 90".


Height: 72".

Main frame: 1-5/8" OD × 16 gauge thickness.

Grill: 18 uprights of 3/4" OD × 16 gauge thickness.

Upright spacing: 4.7"

Feet: flat/bridge/fixed.

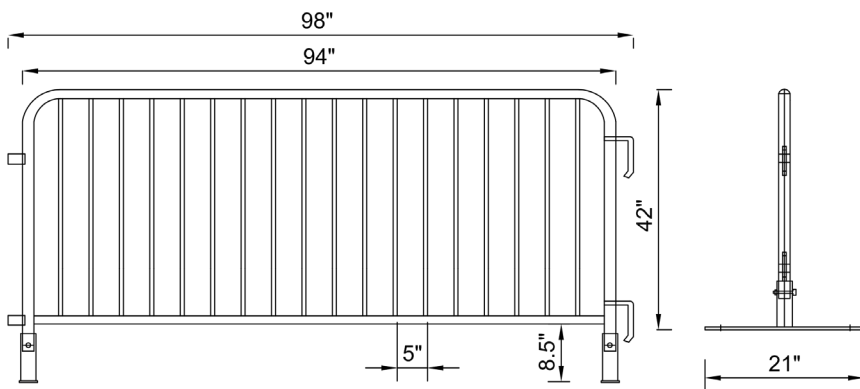

Length: 98".

Height: 42".

Main frame: 1-1/2" OD × 18 gauge thickness.

Grill: 18 uprights of 5/8" OD × 18 gauge thickness.

Upright spacing: 5".

Feet: flat/bridge/fixed.

